

WALLY

We have developed a wall fitting to create a natural environment. The WALLY is suitable for outdoor applications such as the fixtures from the Timberlab collection. Thanks to a non-visible system - made of stainless steel - suspension is easy and the WALLY can be secured against theft. The WALLY radiates light upwards, downwards, or both. Your driveway lit by STRATOs. The path to your front door with EYES, and the WALLY next door makes it complete, never having to search for the right key in the dark ever again.




SPECIFICATIONS

- **Thickness:** 100 mm
- **IP class:** IP54
- **Voltage:** 230 volts
- **Power:** 2.4/3.6Watt (1/2 x LED)
- **Lumen output per LED module:** 2,700K = 120 lm
4,000 K = 150 lm
amber = 82 lm
- **Beam angle:** The LED module has a beam angle of 120 degrees.
- **Lifespan:** Every type of wood has its own durability rating. More information about this can be found under "Types of wood" & "Sustainability". The LED module has an expected lifespan of 100,000 hours.
- **Lighting data:** Lighting data available on request.

OPTIONS

- **Wood type:** Larch/Douglas, Oak, Rustic Chestnut or Accoya
- **Quality mark:** FSC or PEFC
- **Light colour:** Available in 2,700, 4,000 K and amber (593 nm).
- **Number of LED modules:** Light up, light down or both.
- **Variations:** At Timberlab, every fixture is carefully produced for you. In addition to the standard options, we are happy to create variations for your application. Think of a custom milled house number sign.

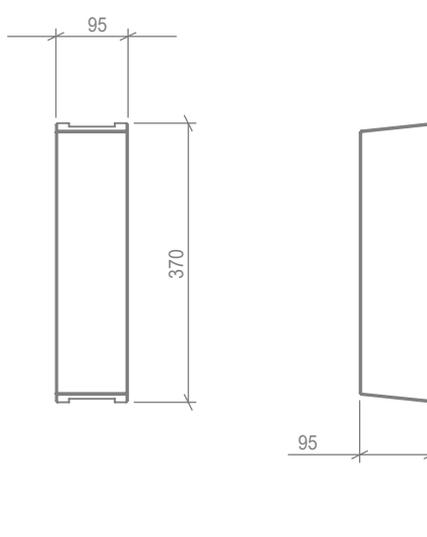

| | weight | CO2 storage |
|---------------|--------|-------------|
| Larch/Douglas | 5 kg | 8 kg |
| Chestnut | 5 kg | 8 kg |
| Oak | 6 kg | 10 kg |
| Accoya | 5 kg | 7kg |



Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.