

# Manual Grupo

Timberlab B.V.  
Harskamperweg 32  
6731 AB Otterlo

## Follow this installation guide for a safe installation.

### General

- Follow this installation guide for a safe installation.
- Timberlab is not responsible for adjustments or modifications on the armature
- We do not recommend the use of concrete mortar for filling in the area around the column. If necessary/derivable, depending on the type of soil a stabilising sand can be applied.

### Maintenance advice

The wood does not require any maintenance. In the course of time, the wood will grey in a natural way. If a treatment is chosen, a moisture regulating surface treatment should always be applied. Ask your supplier for advice! If desired, the LED module can be cleaned with a soft brush.

### Warranty

The product comes with a two-year guarantee. Wood is a natural product. This wood is, unless expressly stated otherwise, fresh, undried, sawn and/or planed (if applicable). No further woodworking was performed. There is always a chance of warping and/or (dry) cracking of the wood. This may occur upon delivery or later. This is not a production error but a natural characteristic of the wood. Warranties do not apply for this.

Product	Wood species	Certification	In ground/ post holder	Colour temperature	Version	Voltage	Variations
				K		VAC	
Grupo (80)	Oak (3)	N/A (0)	L1+PH08 (00)	N/A (0)	N/A (0)	N/A (0)	N/A (00)
		PEFC (2)					

The product code is generated by selecting the options and taking the number in brackets ().




21-03-2022



# Grupo


## 1. Drilling

Drill or dig holes in the ground




## 2. Place

- Place the Grupo in the hole

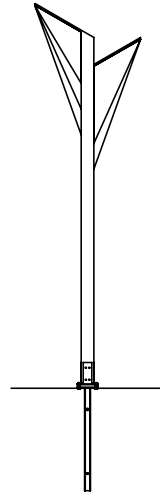

## 3. Finishing

- Straighten the pole with the help of a spirit level
- Close the hole in the ground

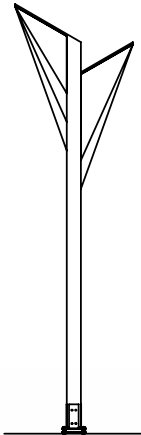

CE



21-03-2022